



CAVALLI

CMB-G STAINLESS STEEL PUMP

FEATURES

Liquids temperature: -20°C to 80°C

Maximum pressure: 10 bar

Motor type: TEFC, Class F, IP 55

Voltage: 3/50/380 ~ 440

Materials:

SUS 304 wetted parts – Casing, Impeller,
Shaft & back cover.

APPLICATIONS

Transfer of clean liquids

Water supply

Water treatment







Food industries

Pharmaceutical

Booster system

PERFORMANCE CURVES







CMB-G 50

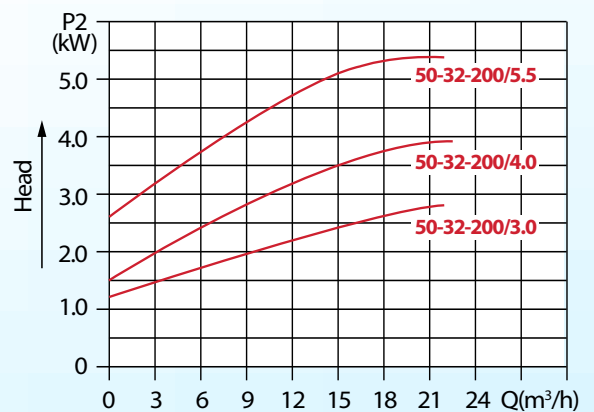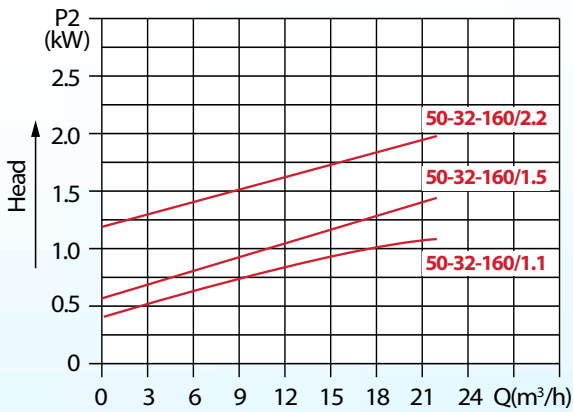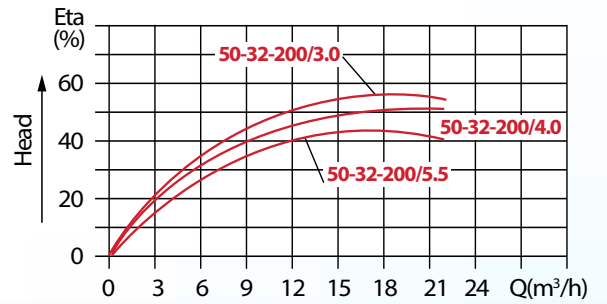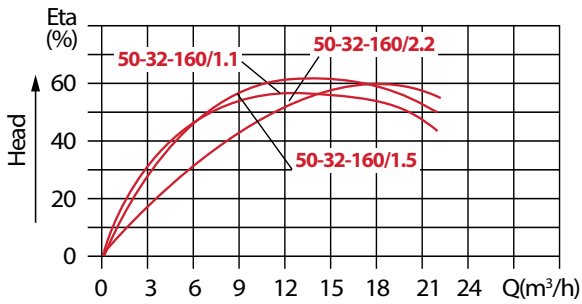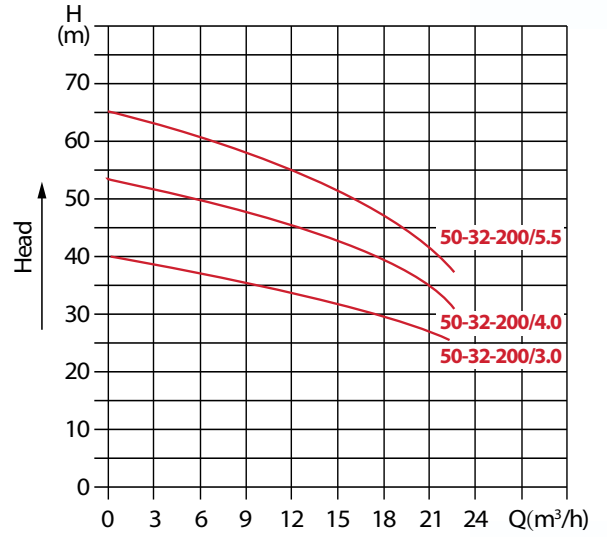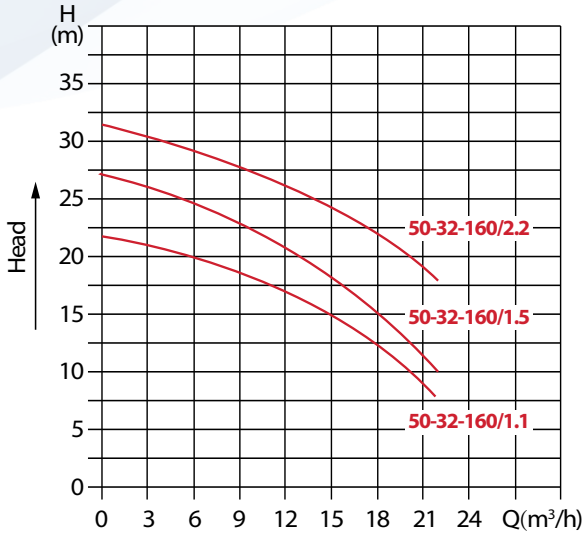

Model	Power P ₂ (kW)	Head (m)	Rated Head (m³/h)	Q (m³/h)	3	6	9	12.5	15	18	20	22
					H (m)							
CMB-G 50-32-160/1.1	1.1	16.5	12.5	H (m)	21	20	18.5	16.5	15	12.5	10	8
CMB-G 50-32-160/1.5	1.5	20	12.5		26	24.5	22.5	20	18.5	15	12.5	9.5
CMB-G 50-32-160/2.2	2.2	26	12.5		30.5	29.5	27.5	26	24	22.5	20.5	18
CMB-G 50-32-200/3.0	3.0	34	12.5		38	37	35	34	32	30	28	26
CMB-G 50-32-200/4.0	4.0	45	12.5		51.5	50	48	45	43	41	39	30
CMB-G 50-32-200/5.5	5.5	54	12.5		62	60	58	54	52	47	42	37

PERFORMANCE CURVES







CMB-G 65

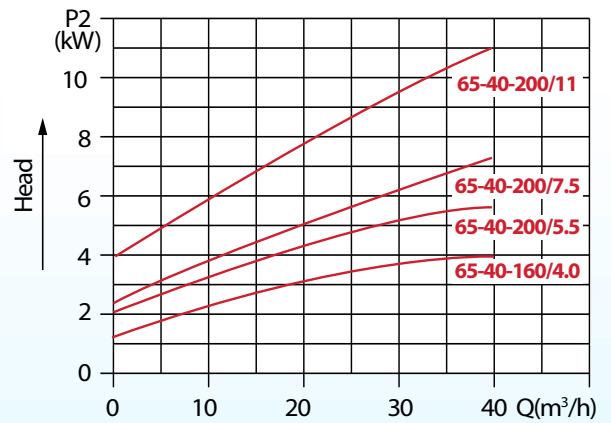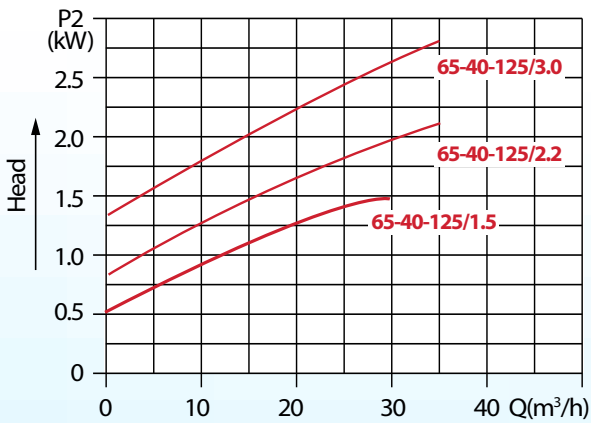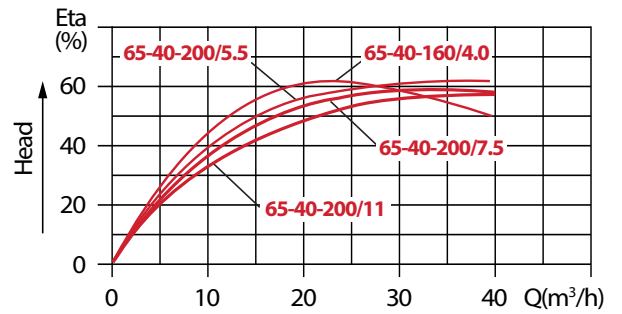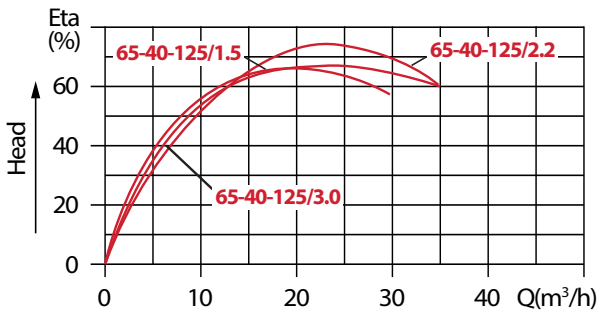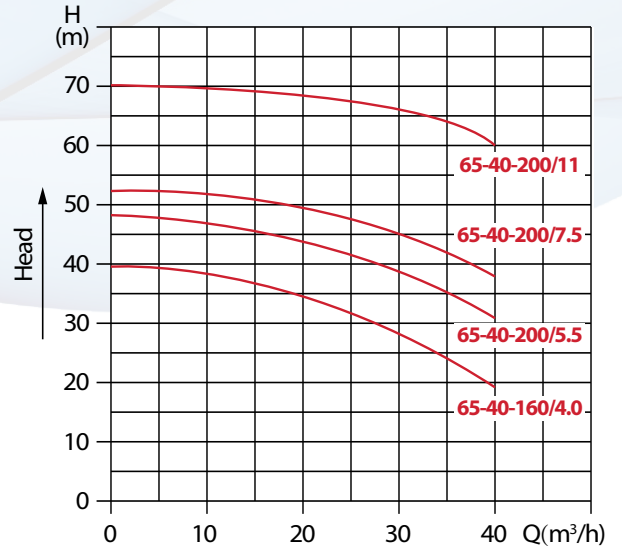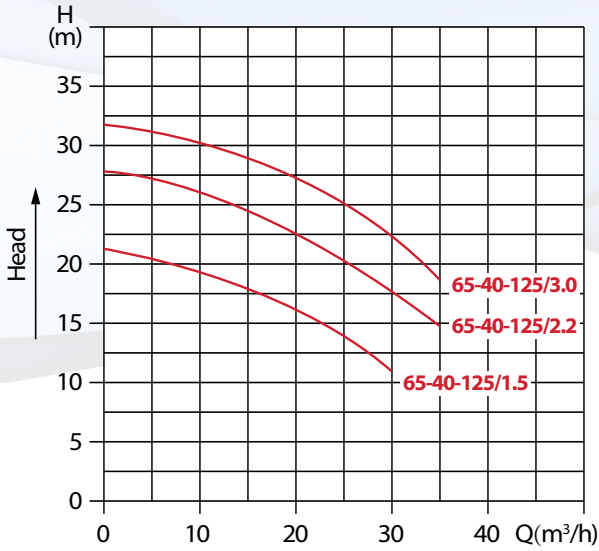

Model	Power P ₂ (kW)	Head (m)	Rated Head (m³/h)	Q (m³/h)	5	10	15	20	25	30	35	40
CMB-G 65-40-125/1.5	1.5	13	25	H (m)	20	19	17.5	16	13	10.5	-	-
CMB-G 65-40-125/2.2	2.2	20	25		27	26	24	22	20	17	14	-
CMB-G 65-40-125/3.0	3.0	25	25		31	30	29	27	25	22	18	-
CMB-G 65-40-160/4.0	4.0	31	25		39	38	36.5	34	31	28	24	19
CMB-G 65-40-200/5.5	5.5	41	25		47	46	45.5	44	41	38	34	30
CMB-G 65-40-200/7.5	7.5	48	25		52	51.5	51	50	48	45	42	38
CMB-G 65-40-200/11	11	68	25		69	69	68.5	68	68	66	64	60

PERFORMANCE CURVES







CMB-G 65

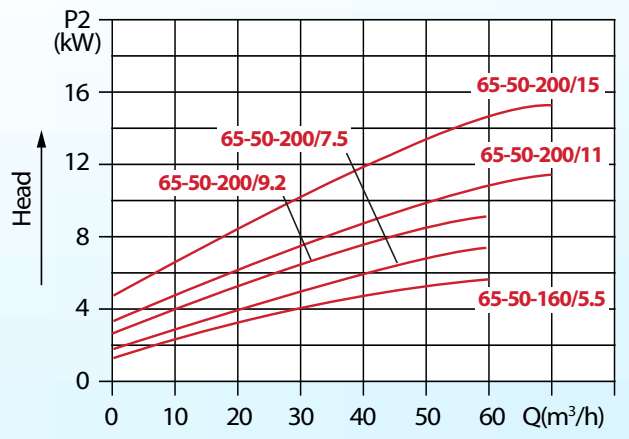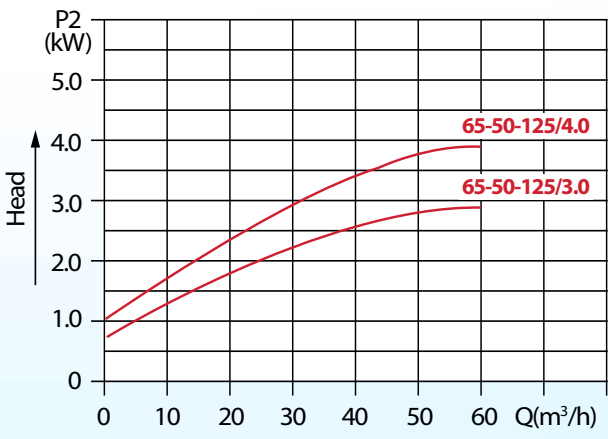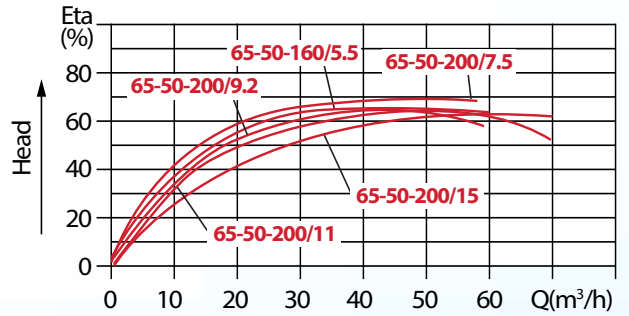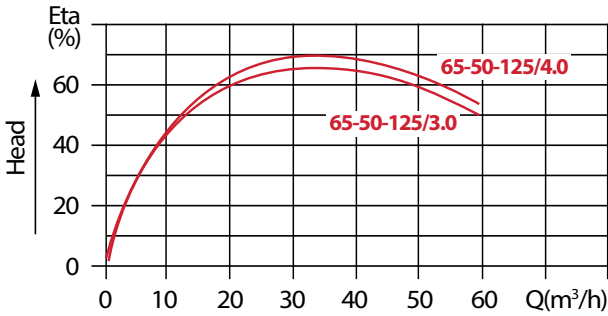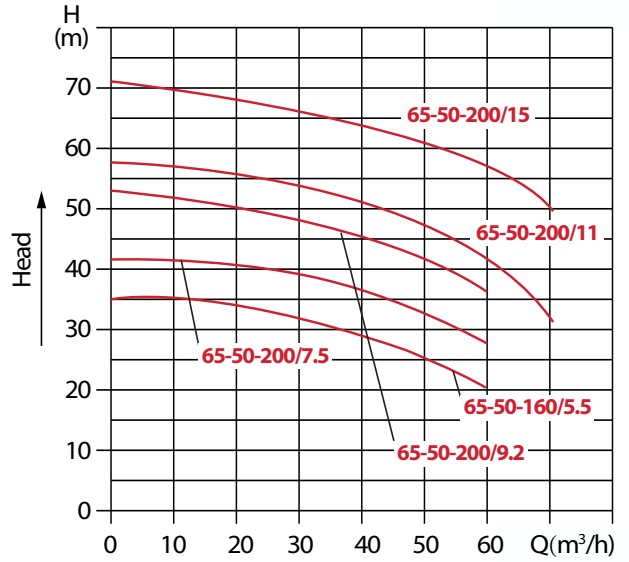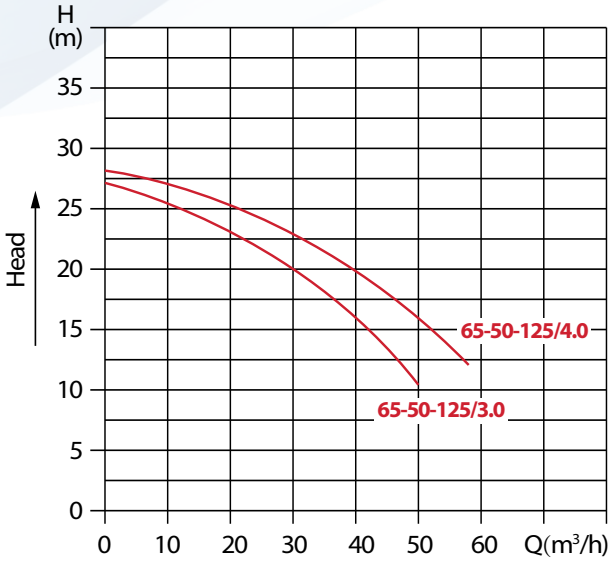

Model	Power P ₂ (kW)	Head (m)	Rated Head (m³/h)	Q (m³/h)	5	10	20	30	40	50	60	70
CMB-G 65-50-125/3.0	3.0	16	40	H (m)	27	26	23	20	16	10	-	-
CMB-G 65-50-125/4.0	4.0	21	40		28	27	26	24	21	16	-	-
CMB-G 65-50-160/5.5	5.5	24	50		34.5	34.5	34	31.5	28.5	24	20	-
CMB-G 65-50-200/7.5	7.5	32	50		41	41	40.5	39	36	32	27.5	-
CMB-G 65-50-200/9.2	9.2	41	50		52	52	51	49	45	41	37	-
CMB-G 65-50-200/11	11	48	50		57	56	55	53	51	48	42	32
CMB-G 65-50-200/15	15	62	50		69	68	67	65	64	62	57	50

PERFORMANCE CURVES







CMB-G 80

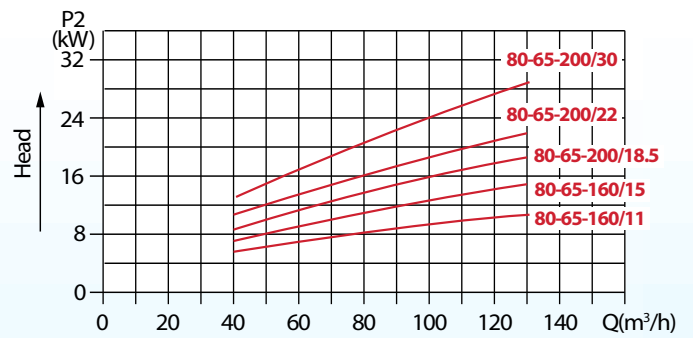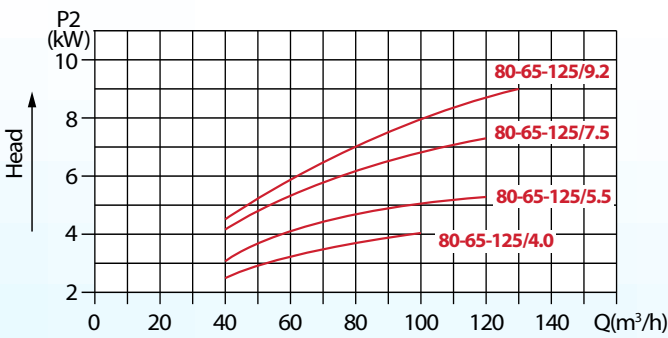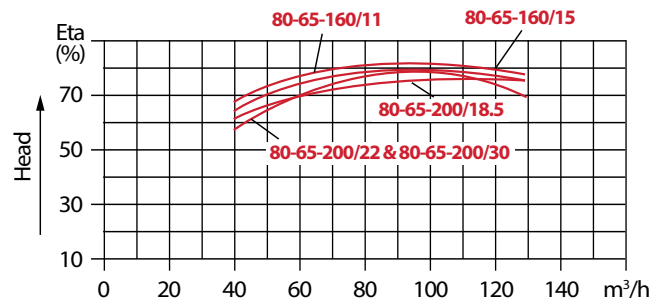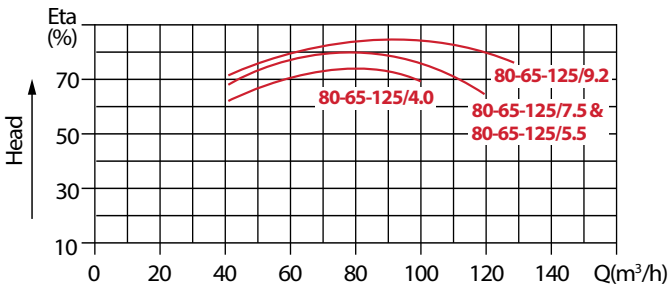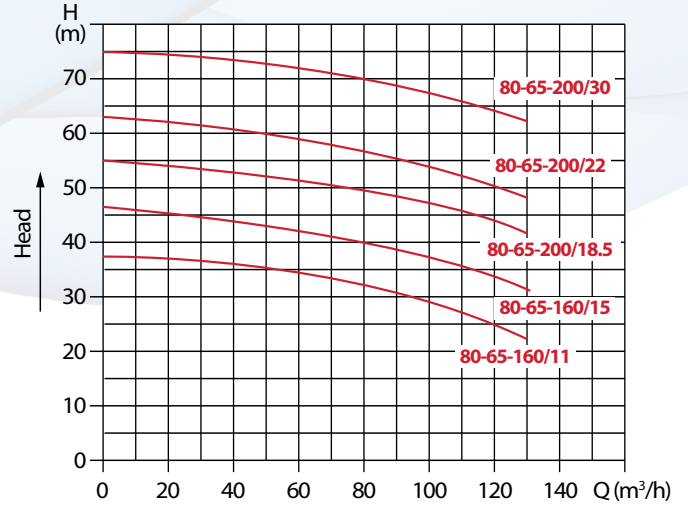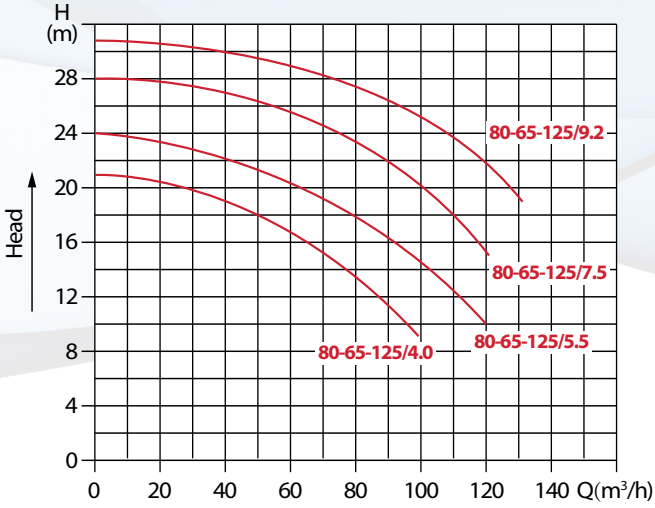

Model	Power P ₂ (kW)	Head (m)	Rated Head (m³/h)	Q (m³/h)	40	50	60	70	80	90	100	110	120	130
CMB-G 80-65-125/4.0	4.0	13	80	H (m)	19	18	17	15	13	11	9	-	-	-
CMB-G 80-65-125/5.5	5.5	15	100		22	21	20	19	18	17	15	13	10	-
CMB-G 80-65-125/7.5	7.5	20	100		27	26	25	24	23	22	20	18	15	-
CMB-G 80-65-125/9.2	9.2	25	100		30	29	29	28	27	26	25	23	22	19
CMB-G 80-65-160/11	11	29	100		36	35	34	33	32	31	29	27	25	22
CMB-G 80-65-160/15	15	37	100		44	43	42	40	39	38	37	36	34	32
CMB-G 80-65-200/18.5	18.5	47	100		53	52	51	50	49	48	47	45	44	41
CMB-G 80-65-200/22	22	54	100		60	59	58	57	56	55	54	53	51	49
CMB-G 80-65-200/30	30	67	100		72	72	71	70	69	68	67	66	65	63

PERFORMANCE CURVES

CMB-G 100

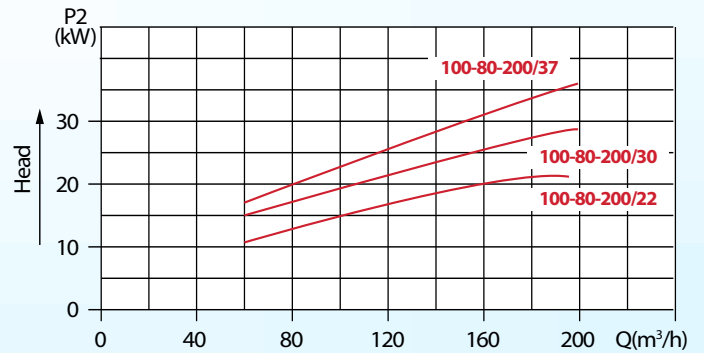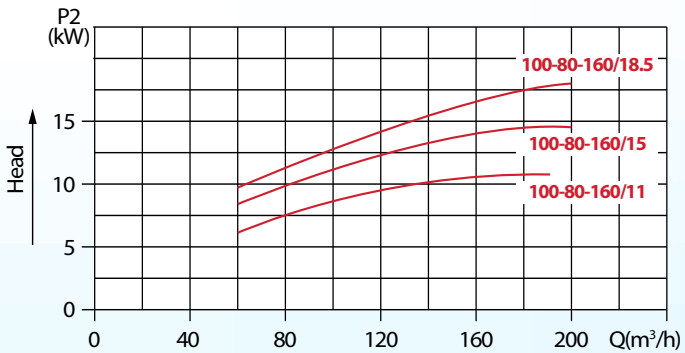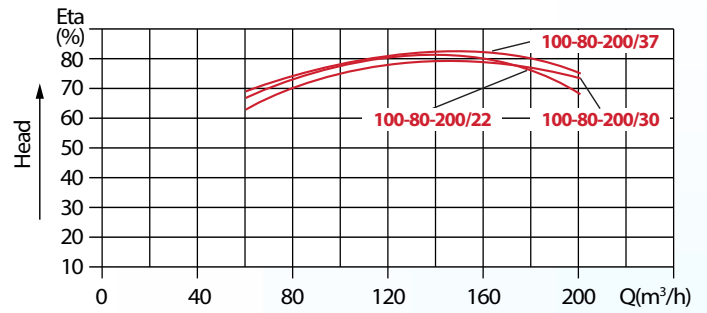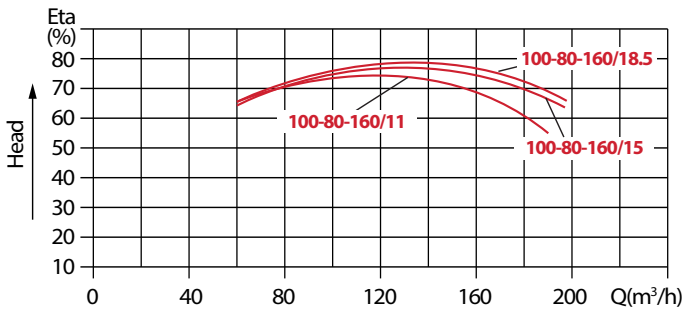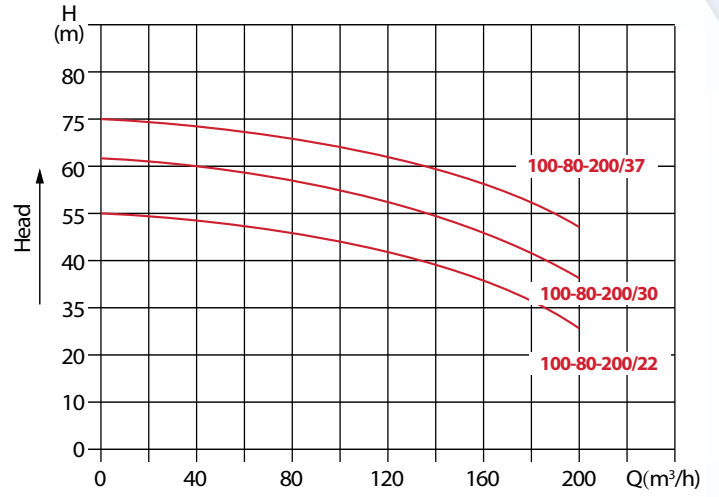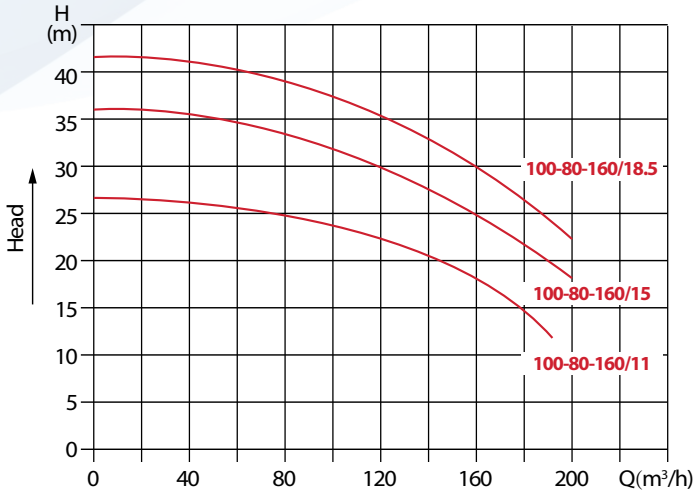

Model	Power P ₂ (kW)	Head (m)	Rated Head (m³/h)	Q (m³/h)	60	80	100	120	140	160	180	192	200	
					H (m)									20
CMB-G 100-80-160/11	11	17	160	H (m)	26	25	23	22	20	17	14	11	-	
CMB-G 100-80-160/15	15	24	160		35	33	31	29	27	24	21	20	18	
CMB-G 100-80-160/18.5	18.5	30	160		38	37	36	35	33	30	27	25	22	
CMB-G 100-80-200/22	22	35	160		46	44	42	40	38	35	31	29	26	
CMB-G 100-80-200/30	30	47	160		57	56	55	53	50	47	44	42	39	
CMB-G 100-80-200/37	37	56	160		66	65	63	61	59	56	53	51	48	